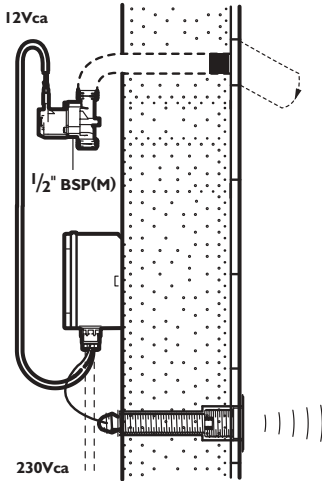


Tempomatic single shower**Data**

Tempomatic single electronic shower by detection of user presence, and includes:

- Wall detector
- Electronic unit with solenoid valve 1/2" BSP(M)
- Transformer 230/12 V

Two functioning options are available:

- Automatic operation by detection of presence at 60cm.
- Automatic shut-off – flow stops 2 sec after the user has left (*adjustable security shut-off delay 20 sec to 2 min in the case of abuse*)
- Voluntary shut-off – flow commences by passing hand in front of detector (*within 10cm*) and stops with second hand movement or after security shut off (*factory set at 60 seconds, adjustable between 20 sec and 2 min*).

Code numbers

- 452565 - Tempomatic single shower with concealed detector.
- 452150 - Tempomatic single shower with crosswall detector through the wall 150mm thick.

Description

The Tempomatic single shower system offers the optimum in time flow operation.

Two functional options are available.

Automatic operation - On detecting the presence of a user, the solenoid valve opens and closes 2 seconds after the user has left.
Voluntary operation - The user starts the shower by passing their hand across the sensor (up to 10cm from the sensor) and stops by a second hand movement.

How to specify

Tempomatic single shower control with concealed detector.
Code no. 452565

With crosswall detector < 150mm. Code no. 452150