

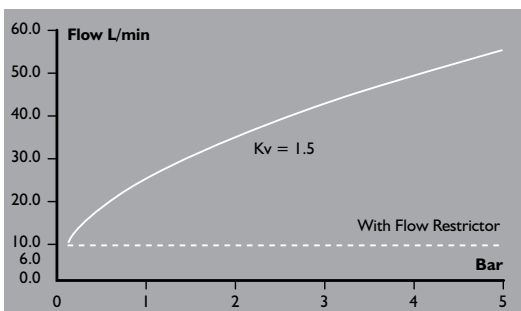


**Avance Elite exposed shower control**

- A.** 135-145mm
- B.** 178mm max
- C.** 36.5mm
- D.** 115mm

**Capacity with open discharge**  
(with no terminal fittings)**Data**

Thermostatic shower mixing valve licence type 3.

- Maximum temperature – 90° C
- Recommended pressure – 0.15 to 3.0 Bar
- Pressure – 0.10 Bar
- Temperature differential – 10° C (*cold water failsafe*)
- Maximum pressure – 10 Bar
- Maximum differential – Compliant to DO8 spec. (BS 7942)
- Normal control temperature – 41° C (*adjustable*).

Single control operation through cold to maximum set temperature.

- Temperature differential – 10° C (*cold water failsafe*)
- Connections (*swivel unions*). – 15mm compression
- N.R.V's fitted to hot & cold inlets.

NOTE - hot and cold inlets must be connected correctly.  
Top or bottom outlet. 10L/min flow regulator fitted in outlet connector. Full spares kit available. Code no. 500427

The use of isolating ball valve strainers is recommended with these valves.

**Materials**

- Body – DZR brass
- Cover – ABS plastic, chrome plate finish
- Knob – ABS plastic, chrome plate finish
- Valve/shroud – Noryl GFN3
- Element – Copper

**Code numbers**

- 351501 - Avance Elite exposed, chrome finish.
- 451501 - Avance Elite exposed, chrome finish with Multi Mode flexible shower kit.
- 260003 - Isolating ball valve strainer 15mm.

**Approved applications**

HP-S, LP-S, and LP-SE with flow regulator fitted.  
Approved to DO8 spec. no. ETC/BC 104 0804  
WRAS listed no. 0406086

**Application**

The Avance Elite thermostatic shower mixing valve is an attractive single sequential control and is ideally suited for single point shower applications where durability and high performance is essential. Its attractive appearance makes the Avance Elite a natural choice for houses, hotels, university halls of residence, health & elderly care and sports & leisure facilities. Suitable for vented or unvented systems and with combi-boilers.

**How to specify**

Avance Elite thermostatic shower valve exposed, chrome finish. Code no. 351501

Avance Elite thermostatic shower valve exposed, chrome finish complete with Multi Mode flexible shower kit. Code no. 451501

Isolating ball valve strainer 15mm. Code no. 260003