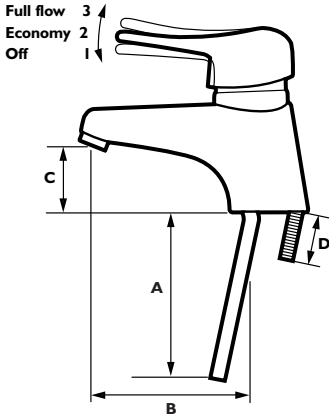
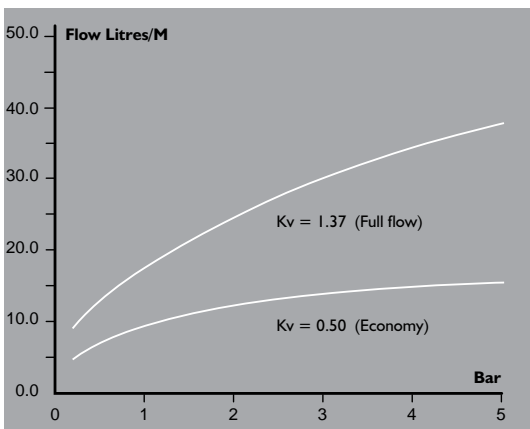


**Monobloc mixing tap mechanism.**  
**Lever operated**


- A.** 350mm  
**B.** 110mm  
**C.** 45mm  
**D.** 40mm

**Capacity with open discharge**  
 (with no terminal fittings)

**Data**

Maximum temperature	– 90° C
Recommended pressure	– 0.1 to 3 Bar
Maximum pressure	– 10 Bar
Connections	– 2x10mm tails.

Flow diffuser fitted to outlet spout.

Supplied with 2 x 15mm x 10mm connectors and blanking plug (*chrome*) for cold tap basin hole.

Two position lever for full and economy flow.

Temperature and flow adjustment by single lever action.

Safe water temperatures.

Basin taps and mixers should always be used in conjunction with an appropriate thermostatic mixing valve to provide a safe maximum water temperature.

Full spares kit available.

**Materials**

Body	– DZR brass chrome plate finish
Lever	– Zinc ( <i>Alloy</i> ) chrome plate finish
Cartridge	– Ceramic disc

UK WFBS listed no. 9611011

**Code numbers**

218551 - Monobloc basin mixer.

218555 - Monobloc basin mixer with pop up waste.

**Application**

The Douglas Monobloc tap is ideally suited for handwashing in a wide variety of applications. It is a natural choice for hotel, leisure, health and elderly care facilities where the prevention of accidental scalding is a priority. Its aesthetically pleasing appearance complements the Thermomix and Duotherm bath/shower valves to create a luxury suite of matching bathroom fittings.

**How to specify**

Monobloc basin mixer with single lever action.

Code no 218551

Monobloc basin mixer with single lever action, pop-up waste.

Code no 218555