



#### Tempomatic 3 and Tempomatic Mix 3 electronic basin tap or mixer

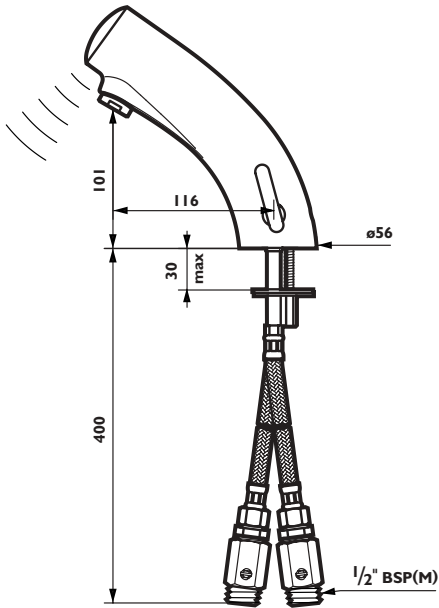

#### Tempomatic 3 wall mount

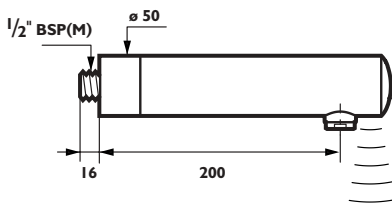

Dimensions in mm

#### Data

Tempomatic Mix 3 electronic basin mixer and Tempomatic 3 electronic wall mounted tap are supplied complete with 6V Lithium batteries, solenoid valve and electronic control all integrated in the body of the tap.

- Infrared detection of presence
- Regulated flow-rate 6 L/min., scale proof aerator
- Stainless steel flexible inlets with filters
- Solid chrome-plated body with reinforced fixing
- Anti blocking flow safety devices

#### Code numbers

492006 - Tempomatic Mix 3 electronic basin mixer with side temperature selector. 1/2" BSP(M) with non-return and stop valves.

442006 - Tempomatic electronic basin tap without temperature selector.

443006 - Tempomatic Mix 3 wall mounted basin tap exposed 1/2" BSP(M) inlet.

#### Technical specifications

- Recommended pressures – 0.5 to 5 bar.
- Maximum pressure – 8 bar.
- Maximum temperature supply – 70°C.
- Balance pressures – CW and HW ( $\Delta P < 1 \text{ bar}$ ).
- If necessary, protect the whole installation with cartridge filters and pressure reducing valve
- Water-proof electronic control box/cartridge
- Corrosion-proof solenoid valves
- CE Mark Electronic controls are CE certified according to the European Directive CEM89/336/CEE art.10.2
- Safe water temperatures.

Basin taps and mixers should always be used in conjunction with an appropriate thermostatic mixing valve to provide a safe maximum water temperature

#### Advantages

- Easy to install - electronic control, lithium batteries and solenoid valve are inside tap
- Easy to use - sensor located on top allows optimized detection of hands
- Low maintenance

Batteries and solenoid are accessible without de-mounting tap

Battery life > 300,000 cycles (3 -5 years).

Water savings up to 70% regulated flow rate at 6 L/min and auto shut off on removal of hands.

Safety shut down after 20 secs in case of abuse or permanent detection.

#### How to specify

Tempomatic Mix 3 electronic basin mixer with side temperature selector - 6 V battery operated. Code no 492006

Tempomatic 3 electronic basin tap - 6 V battery operated. Code no 442006

Tempomatic 3 electronic wall mounted tap - 6 V battery operated. Code no 443006