



### Wall mounted spout - crosswall

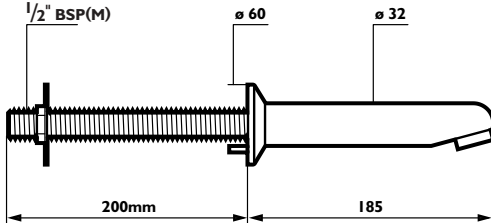

### Crosswall spout - anti vandal

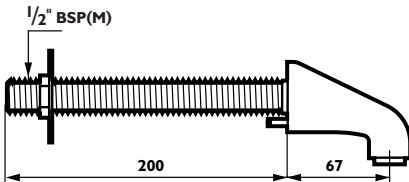

#### Data

A range of basin and anti-vandal spouts for crosswall mounting.

#### Code numbers

204185 - Wall mounted spout  $\varnothing 32$  for wall thickness 150mm  
(*anti-rotation stop pin*) and scale proof flow restrictor 6 L/min.  
204009 - Crosswall anti-vandal spout 200mm with flow straightener.

#### Pressures and flow-rates

• Dynamic pressure	bar	0.5	1	2	3	4	5
• Maximum adjustable flow-rate	l/s	0.14	0.20	0.30	0.36	0.40	0.44
• Recommended pressure:		0.3 to 5 bar.					

- Tamperproof

#### Advantages

Vandal resistant: specify designed for intensive use in public places, tamperproof flow-straightener, reinforced fixing, anti-rotation pin.

#### How to specify

Wall mounted spout - crosswall chrome finish 150mm with anti rotation pin and scale resistant flow regulator. Code no. 204185

Crosswall anti vandal spout - chrome finish 200mm with anti rotation pin and flow straightener. Code no. 204009

Dimensions in mm