



### Tempomatic urinal (crosswall)

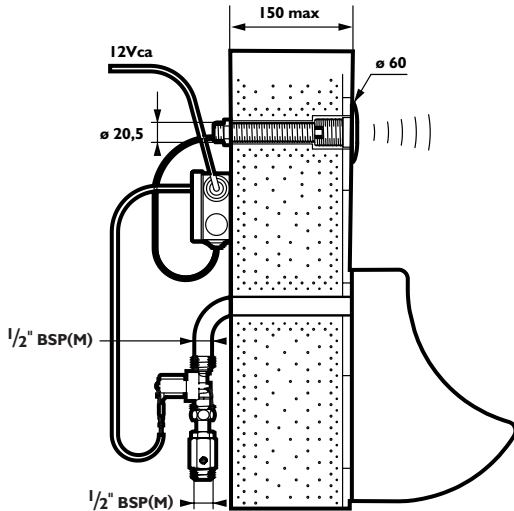

### Tempomatic urinal recessed

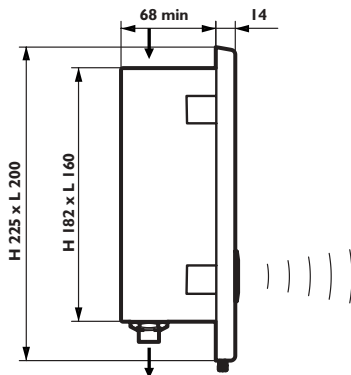

Dimensions in mm

### Data

Tempomatic crosswall "through the wall" and Tempomatic urinal recessed electronic flush valve for standard urinal installation in servicing area.

- Electronic control box mains powered 230/12V without transformer.
- Solenoid valve 1/2" BSP(M) with filter and stop valve.

### Code number

- 428200 - Tempomatic urinal crosswall for walls up to 200mm thick. Chrome plated.
- 428100 - Tempomatic urinal recessed for standard urinals 1/2" BSP satin stainless steel (225x200).
- 429100 - Tempomatic urinal recessed for siphonic action urinal 3/4" BSP satin stainless steel (225x200).

Safety Transformer 230V /12V class 2 to supply up to 5 Tempomatic. Order separately.

### Description

Electronic flush valve for automatic individual urinal flushing. Detection of the user by infrared beam, automatic shut-off without contact.

- Detection distance, shut-off delay and flow rate are adjustable by the installer. Pre-rinse operation can be over-riden at commissioning.
- Mains powered 230/12 V.

### Advantages

- CE Mark Electronic controls are CE certified according to the European Directive CEM89/336/CEE art.10.2
- Ease of use: automatic functioning without hand contact. Stops bad smells (*automatic pre-rinse - 2 secs - and flush after use*).
- Total Hygiene: non touch operation keeps germs at bay. Automatic flush every 12 hours after use.
- Water and energy savings: only the used urinal is flushed (*flow rate and shut-off delay are adjustable by the installer*).
- Servicing:
  - stops urinal drains clogging
  - avoids creating vacuum in water waste (*automatic flushing every 12 hours after the last use*).

### How to specify

Tempomatic urinal crosswall system - chrome plated finish 1/2" BSP(M) - 230V/12V and for wall up to 200mm.

Code no. 428200

Tempomatic urinal recessed for standard urinals 1/2" BSP satin stainless steel (225x200). Code no. 428100

Tempomatic urinal recessed for siphonic action urinal 3/4" BSP satin stainless steel (225x200). Code no. 429100

Transformer only 230V /12 V suitable for DIN wire. Code no. 406000

Transformer complete with wall mounted PVC box (170x140x45) with bi-polar switch. Code no. 406220